

PLANTING and SITE FURNITURE NOTES:

All work shall be done in accordance to local City code and other governing agencies' regulations. Specifications take precedence over drawings and details and should be adhered to in all construction.

All plant materials and planting locations shall be staked and approved by Boise Parks & Recreation prior to beginning of work.

Contractor shall verify location of all underground utilities when in close proximity to planting areas, and shall take precautions to avoid damage to such. Contractor assumes full responsibility for all damage caused by failure to do so.

Contractor shall report to Boise Parks & Recreation all conditions which impair and/or prevent the proper execution of this work, prior to beginning work.

Contractor shall prune plant material only as approved by Boise Parks & Recreation.




Contractor shall water settle all shrub and tree pits, leaving a tree well around tree trunks as per details. All tree planting areas shall receive 5" shredded bark mulch. Bark shall be placed so as no mulch comes in contact with trunk of tree.

PLANTING LEGEND

- Bench
- Trash Receptacle

PLANTING SCHEDULE:

Qty	Size	Botanical Name	Common Name
1	4"	<i>Quercus trincetris</i> 'Stolonator'	Stolonator Manufact.

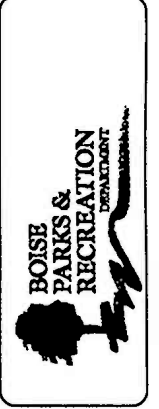

MANITOU PARK
PRE-SCHOOL/SCHOOL-AGE PLAYGROUND
REPLACEMENT/RENOVATION
1 9 9 8

PLANTING and SITE
FURNITURE PLAN

Checked By	Checked By
Date	Date
Scale	Scale
Drawn By	Drawn By

