
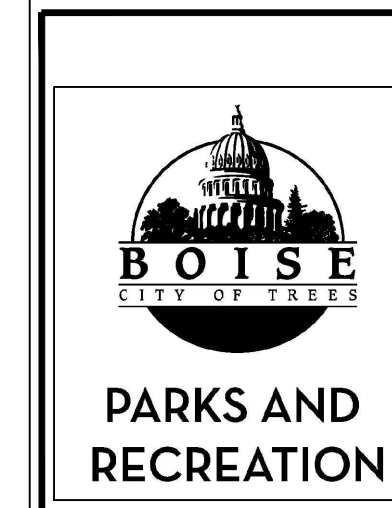



Date	Review

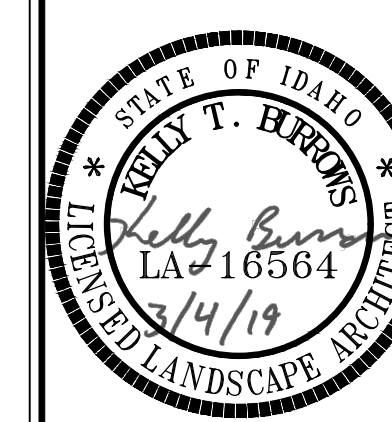

**GREENBELT ROTARY
PLAZA**

**CONSTRUCTION
SHEET**

Surveyed By:	Checked By:
Drawn By: KTB	Date: 3/04/2019
Scale: See Sheet	Job No.

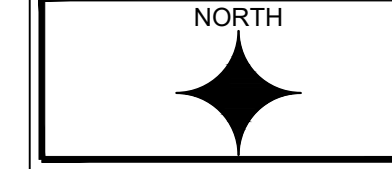

Sheet Number
2 of 4

CONSTRUCTION NOTES: #

- | | |
|---|--|
| <p>1 PROVIDE CONCRETE FOOTING PER ENGINEER'S DETAIL. COORDINATE ACCESS FOR OTHERS TO SET MONUMENT. INSTALL PAVERS FLUSH WITH CONCRETE FOOTING.</p> <p>2 CONTRACTOR TO PROVIDE 6 IN GROUND FOOTINGS PER DETAIL 'H' KIOSK FOOTING DETAIL FOR (3) INTERPRETIVE SIGNS PROVIDED BY OTHERS</p> <p>3 PROVIDE AND INSTALL BENCH (TYP OF 4) PER DETAIL 'D' SHEET 4</p> <p>4 INSTALL OWNER SUPPLIED LIBRARY KIOSK PER FOOTING DETAIL 'H' SHEET 4</p> <p>5 PROVIDE AND INSTALL BIKE RACKS (TYP OF 3) PER DETAIL 'F' SHEET 4</p> <p>6 PROVIDE AND INSTALL TRASH RECEPTACLE PER DETAIL 'E' SHEET 4</p> <p>7 PROVIDE AND INSTALL BASALITE MISSION BRICK PAVERS. SIZE TO BE 4"X8" COLOR TO BE CHILI PEPPER RED. PROVIDE A SAMPLE FOR APPROVAL. INSTALL PER DETAIL 'B' SHEET 4.</p> | <p>7.1 INSTALL APPROXIMATELY 144 - 4"X8", 100 - 8"X8" IN THE HATCHED AREA. INCORPORATE 11 - 8"X8" GRANITE BRICKS IN MULTIPLE LOCATIONS ADJACENT TO BENCHES. THESE ARE PROVIDED BY THE ROTARY CLUB. OBTAIN THEM FROM FUNDRAISERS, INC.</p> <p>8 PAVER CURB PER DETAIL 'C' SHEET 4</p> <p>9 PROTECT IN PLACE EXISTING CONCRETE GREENBELT. NEW PAVERS TO BE FLUSH TO THE GREENBELT.</p> <p>10 PROVIDE AND INSTALL DERO FIXIT BIKE REPAIR STATION PER MANUFACTURER'S RECOMMENDATIONS AND ON A CONCRETE PAD PER DETAIL 'A' SHEET 4.</p> <p>11 PROTECT IN PLACE EXISTING CHAIN-LINK FENCE. ADD A 4' LOCKABLE MAN GATE TO THE EXISTING FENCE TO PROVIDE MAINTENANCE ACCESS TO THE IRRIGATION SYSTEM. COORDINATE THE LOCATION WITH BPR REPRESENTATIVE AT TIME OF CONSTRUCTION.</p> |
|---|--|

